



HERZANN

 **MCC Medical**

Electrosurgery
HF-Generators and Accessories

Electrosurgery



Since the late 90's, MC Medizintechnik Export, located in southern Germany, has provided to prominent medical distributors of products such as implants, prostheses, instrumentation and equipment for general and orthopedic surgery among others.

MCC Medical is a registered trademark of MC Medizintechnik Export. With this brand we design, manufacture and sell instruments and medical equipment. Our products are the result of responsible bio-medical research and production processes and quality based on the most advanced global standards applicable to medical technology.

All the employees that make our company have a very clear goal. Being leaders in the provision of surgical instruments and medical equipment of the highest international level. We develop instruments that allow greater security, reliability and comfort of surgery.

For this reason not only offer stainless steel instruments, but also in titanium. There are lighter and less tiring for surgeries that extend over time.



For more than 50 years:
Quality and Safety

Know How and Innovation

Technology and Precision

Service and Flexibility

Quality Management:

Certified according to: ISO 13485;
Annex II, section 3 of the directive
93/42/EEC

Our Products:

Instruments for MIS (Laparoscopy,
Hysteroscopy, Arthroscopy, Urology)

Endoscopy units

Electrosurgery and accessories

Plastic surgery

Titanium-implant-systems for maxillo-
facial as well as hand- and radius
surgery, mandibular reconstruction

Scissors and micro-scissors, also with
TC-inserts or "super cut"

Instruments for general surgery

Inhaltsverzeichnis

Seite

Adapter monopolar und bipolar	9
Anschlusskabel	7, 10-11
Argon Regulator	40
Bipolare Arthroscopie-Elektroden	23
Bipolare Pinzetten	25-27
Elektroden und Zubehör für Argongas-Gerät	29-30
Elektrodenhandgriffe	8
Elektrodenverlängerungen	14
Fußschalter	39
Gerätewagen	40
HF Generatoren	32-38
Instrumente und Zubehör für Thermo Stapler	31
Laparoskopieelektroden	24
Monopolare Arthroscopie-Elektroden	21-22
Monopolare Elektroden für Dental und Kosmetik	15
Monopolare Elektroden für Körperhöhlen	16-17
Monopolare Microdissektions-Nadelelektroden für Plastische Chirurgie	18-19
Monopolare Nadelelektroden mit Keramikisolation	20
Monopolare Pinzetten	28
Monopolare Standardelektroden	12-13
Neutralelektroden	4-7

Table of contents

Page

<i>Adaptor monopolar and bipolar</i>	9
<i>Argon regulator</i>	40
<i>Bipolar Arthroscopy electrodes</i>	23
<i>Bipolar forceps</i>	25-27
<i>Connecting cables</i>	7, 10-11
<i>Electrode extensions</i>	14
<i>Electrode handles</i>	8
<i>Electrodes and accessories for Argon gas unit</i>	29-30
<i>Foot switches</i>	39
<i>HF Generators</i>	32-38
<i>Instruments and accessories for Thermo Stapler</i>	31
<i>Laparoscopic electrodes</i>	24
<i>Monopolar Arthroscopy electrodes</i>	21-22
<i>Monopolar electrodes for body cavities</i>	16-17
<i>Monopolar electrodes for dental and cosmetic applications</i>	15
<i>Monopolar forceps</i>	28
<i>Monopolar microdissections needle electrodes for Plastic Surgery</i>	18-19
<i>Monopolar needle electrodes</i>	20
<i>Monopolar standard electrodes</i>	12-13
<i>Return plates</i>	4-7
<i>Trolley</i>	40

Wiederverwendbare Gummi-Neutralelektroden und Zubehör

*Reusable rubber return plates
and accessories*




Für Generatoren
Hermann, Martin,
Berchtold

*For generators
Hermann, Martin,
Berchtold*

Anschlusskabel
H98-903-630
H98-903-650

connecting cables
*H98-903-630
H98-903-650*

H98-901-003

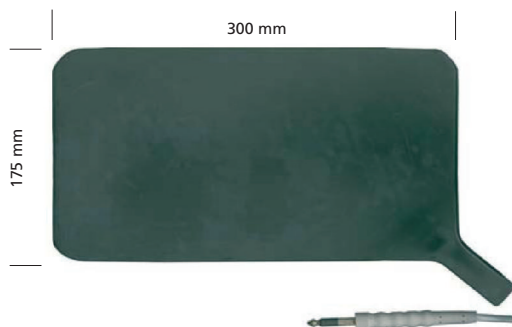

Für Generatoren
Hermann, Martin,
Berchtold, Erbe
mit 4 m Kabel

*For generators
Hermann, Martin,
Berchtold, Erbe
with 4 m cable*

H98-901-004




Für Generatoren
Hermann, Martin,
Berchtold

*For generators
Hermann, Martin,
Berchtold*

Anschlusskabel
H98-903-630
H98-903-650

connecting cables
*H98-903-630
H98-903-650*

H98-901-005

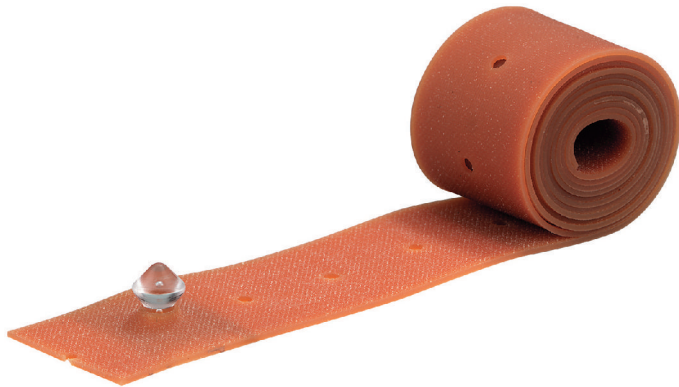

H98-901-120 1000 mm
H98-901-121 500 mm

Elastische
 Gummibinde
 gelocht, mit
 Befestigungs-
 knopf

*Rubber band,
 perforated,
 with fixation
 button*



H98-901-175

Befestigungsknopf
 für Gummibinde

*Button for
 rubber band*

Neutralelektroden zum einmaligen Gebrauch

Single-use return plates

Zur Verwendung mit Kabel:
Für Hermann, Martin, Berchtold, Erbe Generatoren wird Kabel H98-903-830 oder H98-903-850 benötigt.

*To use with cable:
For Hermann, Martin, Berchtold, Erbe generators H98-903-830 or H98-903-850 cable required.*



H98-901-101

ohne Kabel,
für Erwachsene
50 Stk./Karton
Kontaktfläche
ungeteilt 134 cm²
Temperaturanstieg < 3°C
max. Impedanz ca. 1 Ω


*without cable,
adult size
50 pcs./Box
Conductive area
non-splitted 134 cm²
Temperature rise < 3°C
max. impedance approx. 1 Ω*



H98-901-102

ohne Kabel,
für Kinder
50 Stk./Karton
Kontaktfläche
ungeteilt 72 cm²
Temperaturanstieg < 5°C
max. Impedanz ca. 2 Ω


*without cable,
children size
50 pcs./Box
Conductive area
non-splitted 72 cm²
Temperature rise < 5°C
max. impedance approx. 2 Ω*

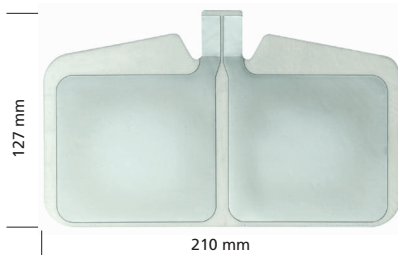

H98-901-103

ohne Kabel,
für Erwachsene
50 Stk./Karton
Kontaktfläche
geteilt 160 cm²
Temperaturanstieg < 3°C
max. Impedanz ca. 1 Ω


*without cable,
adult size
50 pcs./Box
Conductive area
splitted 160 cm²
Temperature rise < 3°C
max. impedance approx. 1 Ω*



H98-901-104

ohne Kabel,
für Kinder
50 Stk./Karton
Kontaktfläche
geteilt 72 cm²
Temperaturanstieg < 5°C
max. Impedanz ca. 2 Ω

*without cable,
children size
50 pcs./Box
Conductive area
splitted 72 cm²
Temperature rise < 5°C
max. impedance approx. 2 Ω*



H98-901-105

ohne Kabel,
oval, universal
50 Stk./Karton
Kontaktfläche
geteilt 105cm²
Temperaturanstieg < 3°C
max. Impedanz ca. 1,5 Ω

*without cable,
oval, universal
50 pcs./Box
Conductive area
splitted 105cm²
Temperature rise < 3°C
max. impedance approx. 1.5 Ω*

Neutralelektroden mit 3 m Kabel zum einmaligen Gebrauch Single-use return plates with 3 meters cable



H98-901-112

für Erwachsene und Kinder
7 Stk./Karton
Kontaktfläche geteilt 110 cm²
Temperaturanstieg < 3°C
max. Impedanz ca. 1,5 Ω
für Hermann, Martin,
Berchtold, Erbe ACC/ICC

adult size and children size
7 pcs./Box
Conductive area splitted 110 cm²
Temperature rise < 3°C
max. impedance approx. 1,5 Ω
for Hermann, Martin,
Berchtold, Erbe ACC/ICC

Anschlusskabel für Neutralelektroden Connecting cable for return plates

Stecker Geräteseite
Plug, generator side

Stecker Neutralelektrodenseite
Plug, return plate side

Für Generator Typ
For generator type

Für Elektrodentyp
For electrode type



Ø 6,3 mm



H98-903-630 3 m
H98-903-650 5 m



Hermann,
Martin,
Berchtold

H98-901-003
H98-901-005



10
2,5



H98-903-730 3 m
H98-903-750 5 m




Valleylab,
Conmed,
Erbe ICC
International

H98-901-003
H98-901-005



Ø 6,3 mm



H98-903-830 3 m
H98-903-850 5 m




Hermann,
Martin,
Berchtold

H98-901-101
H98-901-102
H98-901-103
H98-901-104
H98-901-105



10
2,5



H98-903-950 5 m



Valleylab,
Conmed,
Erbe ICC
International

H98-901-101
H98-901-102
H98-901-103
H98-901-104
H98-901-105

Elektrodenhandgriffe *Electrode handles*

Elektrodenhandgriffe "Premium"
mit fest verbundenem Kabel

*Electrode handles "Premium"
with fixed cable*

H98-902-245 5 m

Ø 4 mm



H98-902-345 5 m

Ø 2,4 mm



Elektrodenhandgriffe "Economic"
mit fest verbundenem Kabel

*Electrode handles "Economic"
with fixed cable*

H98-902-030 3 m

Ø 4 mm



H98-902-050 5 m

H98-902-130 3 m

Ø 2,4 mm



H98-902-150 5 m

für/for
Hermann,
Berchtold International
Valleylab,
Erbe ICC International,



Ø 1,6 mm



H98-902-731 3 m

Elektrodenhandgriff
ohne Schalter
für Hermann, Martin,
Berchtold

*Electrode handle
without switch
for Hermann, Martin,
Berchtold*



Hermann,
Martin, Berchtold

Monopolar Elektroden
für Dental und Kosmetik
Applikationen Seite 15

*Monopolar electrodes
for dental and cosmetic
applications see page 15*

**Monopolare und bipolare
Adapter**
*Monopolar and bipolar
adaptors*



Für Erbe ACC/ICC Generatoren
zum Anschluss von Handgriffen
mit Tasten und US 3-Pin-Stecker

*For Erbe ACC/ICC generators,
connecting fingerswitch handles
with US type 3-pin plug*

H98-902-911



Für Martin, Berchtold
Generatoren zum Anschluss von
Handgriffen mit Tasten und
US 3-Pin-Stecker

*For Martin, Berchtold generators,
connecting fingerswitch handles
with US type 3-pin plug*

H98-902-913



Bipolar-Adapter
für Bipolarkabel (Typ Valleylab
2-pin) an Erbe Generatoren


*Bipolar adaptor
for bipolar cables (type Valleylab
2-pin) for Erbe generators*

H98-902-914

Monopolare Anschlusskabel Monopolar connecting cables


Stecker Geräteseite
Plug, generator side

Stecker Instrumentenseite
Plug, instrument side

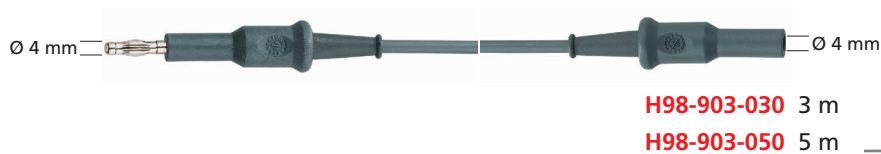

Laparoskopie
passend für
Hermann,
Martin, Berchtold
Generatoren

Laparoscopy
fitting Hermann,
Martin, Berchtold

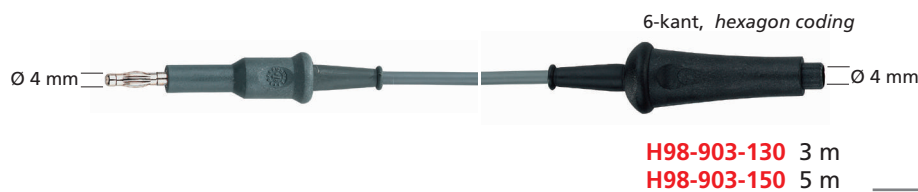

**Arthroskopie-
elektroden**
passend für
Hermann,
Martin, Berchtold
Generatoren

*Arthroscopic-
electrodes*
fitting Hermann,
Martin, Berchtold

Monopolare Resektoskopkabel Monopolar resectoscope cables

Stecker Geräteseite
Plug, generator side

Stecker Instrumentenseite
Plug, instrument side



Passend für
Hermann, Martin,
Berchtold

Fitting
Hermann, Martin,
Berchtold



Passend für
Erbe, Storz

Fitting
Erbe, Storz



Passend für
Valleylab, Bovie

Fitting
Valleylab, Bovie

Bipolare Pinzettenkabel Bipolar cables for forceps

Stecker Geräteseite
Plug, generator side

Stecker Instrumentenseite
Plug, instrument side



H98-903-313 3 m
H98-903-315 5 m

für Erbe ICC/ACC
Generatoren

for Erbe ICC/ACC
generators



H98-903-323 3 m
H98-903-325 5 m

für Berchtold,
Integra
Generatoren

for Berchtold,
Integra
generators



H98-903-330 3 m
H98-903-350 5 m

für Hermann,
US-Modelle 2 Pol
Generatoren

for Hermann
US 2-pin models
generators

Entspricht nicht dem Abschnitt 46.104b) der internationalen Norm IEC 60601-2-2:2007. Kabel nur an bipolaren Ausgang von Elektrochirurgiegeräten anschließen.
Not according to section 46.104b) of the international norm IEC 60601-2-2:2007.
Only connect the cable to bipolar exit of electrosurgical units.



H98-903-373 3 m
H98-903-375 5 m

für Hermann,
Internationale
Modelle 2 Pol
Generatoren

for Hermann,
international
models 2-pin
generators



H98-903-383 3 m
H98-903-385 5 m

für Hermann,
Internationale
Modelle 2 Pol
Generatoren

for Hermann,
international
models 2-pin
generators



H98-903-395 5 m

geschützt,
für Hermann,
Internationale
Modelle 2 Pol
Generatoren

protected,
for Hermann,
international
models 2-pin
generators



H98-903-343 3 m
H98-903-345 5 m

für Hermann,
US-Modell
US-Modelle 2 Pol
Generatoren

for Hermann,
US-model
US 2-pin models
generators

Entspricht nicht dem Abschnitt 46.104b) der internationalen Norm IEC 60601-2-2:2007. Kabel nur an bipolaren Ausgang von Elektrochirurgiegeräten anschließen.
Not according to section 46.104b) of the international norm IEC 60601-2-2:2007.
Only connect the cable to bipolar exit of electrosurgical units.



H98-903-333 3 m
H98-903-335 5 m

für Hermann,
US-Modell
Internationale
Modelle 2 Pol
Generatoren

for Hermann,
US-model
international
models 2-pin
generators

Monopolare Standardelektroden Monopolar standard electrodes

Zur Verwendung
mit Elektrodenhand-
griffen Seite 8
*To use with electrode
handles page 8*



Ø 4 mm

Zur Verwendung
mit Elektrodenhand-
griffen Seite 8
*To use with electrode
handles page 8*



Ø 2,4 mm

	H98-904-401	H98-904-201	Messer 2,5 x 20 mm	<i>knife 2.5 x 20 mm</i>
	H98-904-402	H98-904-202	Messer, fein 1,5 x 17 mm	<i>thin knife 1.5 x 17 mm</i>
	H98-904-419	H98-904-219	Spatel 3 x 24 mm	<i>lancet 3 x 24mm</i>
	H98-904-420	H98-904-220	Spatel	<i>lancet</i>
	H98-904-403	H98-904-203	Messer rautenförmig 2,5 x 25 mm	<i>knife rhombic 2.5 x 25 mm</i>
	H98-904-404	H98-904-204	Messer rautenförmig	<i>knife rhombic</i>
	H98-904-405	H98-904-205	Nadel	<i>needle</i>
	H98-904-406	H98-904-206	Nadel, 45°	<i>needle, 45°</i>
	H98-904-407	H98-904-207	Drahtschlinge Ø 14 mm	<i>wire loop Ø 14 mm</i>
	H98-904-408	H98-904-208	Drahtschlinge Ø 10 mm	<i>wire loop Ø 10 mm</i>
	H98-904-409	H98-904-209	Drahtschlinge Ø 5 mm	<i>wire loop Ø 5 mm</i>

Bestelleinheit:
5 Elektroden
verpackt im
Kunststoffetu

*Order quantity:
5 electrodes
packed in
plastic case*

Zur Verwendung
mit Elektrodenhand-
griffen Seite 8
*To use with electrode
handles page 8*



Ø 4 mm

Zur Verwendung
mit Elektrodenhand-
griffen Seite 8
*To use with electrode
handles page 8*



Ø 2,4 mm

H98-904-410	-	Bandschlinge Ø 16 mm	<i>ribbon loop Ø 16 mm</i>	
H98-904-411	H98-904-211	Bandschlinge Ø 12 mm	<i>ribbon loop Ø 12 mm</i>	
H98-904-412	H98-904-212	Kugel Ø 6 mm	<i>ball Ø 6 mm</i>	
H98-904-413	H98-904-213	Kugel Ø 4 mm	<i>ball Ø 4 mm</i>	
H98-904-414	H98-904-214	Kugel Ø 4 mm	<i>ball Ø 4 mm</i>	
H98-904-415	H98-904-215	Kugel Ø 2 mm	<i>ball Ø 2 mm</i>	
H98-904-416	H98-904-216	Kugel Ø 2 mm	<i>ball Ø 2 mm</i>	
H98-904-417	-	Kugel Ø 1,5 mm	<i>ball Ø 1.5 mm</i>	
H98-904-418	-	Kugel Ø 1,5 mm	<i>ball Ø 1.5 mm</i>	

Bestelleinheit:
5 Elektroden
verpackt im
Kunststoffetu

*Order quantity:
5 electrodes
packed in
plastic case*

**Elektrodenverlängerungen für
Standardelektroden**
*Electrode extensions for
standard electrodes*



Elektrodenverlängerung
mit Sechskant
Ø 4 mm

*electrode extension
with hexagon coding
Ø 4 mm*

H98-904-455



H98-904-456



H98-904-457



Elektrodenverlängerung
mit Sechskant
Ø 2,4 mm

*electrode extension
with hexagon coding
Ø 2.4 mm*

H98-904-255



H98-904-256



H98-904-257



**Monopolare Elektroden
für Dental- und Kosmetikapplikationen**
*Monopolar electrodes
for dental and cosmetic applications*


 Ø 1,6 mm

 für Handgriff H98-902-731
 for handle

H98-904-101	Nadel, 0,2 mm	<i>needle, 0.2 mm</i>	
H98-904-105	Drahtschlinge Ø 3 mm	<i>wire loop Ø 3 mm</i>	
H98-904-106	Drahtschlinge Ø 5 mm	<i>wire loop Ø 5 mm</i>	
H98-904-107	Drahtschlinge Ø 8 mm	<i>wire loop Ø 8 mm</i>	
H98-904-115	Koagulations- Nadelelektrode Ø 0,6 mm	<i>needle electrode coagulating Ø 0.6 mm</i>	
H98-904-116	Kugel Ø 1,7 mm	<i>ball Ø 1.7 mm</i>	
H98-904-117	Kugel Ø 3 mm	<i>ball Ø 3 mm</i>	
H98-904-118	Koagulations- und Fulgurationselektrode	<i>coagulating and fulgurating electrode</i>	

 Bestelleinheit:
 5 Elektroden
 verpackt im
 Kunststoffetui

*Order quantity:
 5 electrodes
 packed in
 plastic case*


**Monopolare Elektroden mit isoliertem Schaft
- für Körperhöhlen**

*Monopolar electrodes with insulated shaft
-for body cavities*



Ø 4 mm

Ø 2,4 mm



H98-904-430

Length 120 mm

H98-904-230

Length 110 mm

Schlinge
Ø 20x20 mm

loop
Ø 20x20 mm



H98-904-431

Length 120 mm

H98-904-231

Length 110 mm

Schlinge
Ø 20 x 15 mm

loop
Ø 20 x 15 mm



H98-904-432

Length 120 mm

H98-904-232

Length 110 mm

Schlinge
Ø 10x10 mm

loop
Ø 10x10 mm



H98-904-433

Length 100 mm

H98-904-233

Length 90 mm

Messer
2,4x20 mm

knife
2.4x20 mm



H98-904-434

Length 100 mm

Messer
rautenförmig
2,2x20 mm

knife
rhombic
2.2x20 mm



H98-904-435

Length 100 mm

Messer
rautenförmig
2,2x20 mm

knife
rhombic
2.2x20 mm



H98-904-445


Length 115 mm

H98-904-245

Length 105 mm

Drahtschlinge
Ø 25 x 10 mm

Wire loop
Ø 25 x 10 mm



H98-904-446


Length 115 mm

H98-904-246

Length 105 mm

Drahtschlinge
Ø 25 x 15 mm

Wire loop
Ø 25 x 15 mm



H98-904-447


Length 115 mm

H98-904-247

Length 105 mm

Drahtschlinge
Ø 25 x 20 mm

Wire loop
Ø 25 x 20 mm



Ø 4 mm

Ø 2,4 mm

H98-904-437

Length 100 mm
0,8x12 mm

H98-904-237

Length 90 mm
0,5x12 mm

Nadel

needle

H98-904-438

Length 100 mm

H98-904-238

Length 90 mm

Nadel,
abgewinkelt
0,8x12 mm

*needle,
angled
0.8x12 mm*

H98-904-439

Length 100 mm

H98-904-239

Length 90 mm

Drahtschlinge
Ø 10 mm

*wire loop
Ø 10 mm*

H98-904-440

Length 100 mm

Drahtschlinge
Ø 5 mm

*wire loop
Ø 5 mm*

H98-904-441

Length 100 mm

H98-904-241

Length 90 mm

Kugel
Ø 6 mm

*ball
Ø 6 mm*

H98-904-442

Length 100 mm

H98-904-242

Length 90 mm

Kugel
abgewinkelt
Ø 6 mm

*ball
angled
Ø 6 mm*

H98-904-443

Length 100 mm

H98-904-243

Length 90 mm

Kugel
Ø 4 mm

*ball
Ø 4 mm*

H98-904-490

Length 100 mm

Nadel
Ø 1,2 mm


*needle
Ø 1.2 mm*

H98-904-491

Length 100 mm

Kugel
Ø 2 mm

*ball
Ø 2 mm*



Monopolare Microdissektions-Nadelelektroden für Plastische Chirurgie

Monopolar microdissection needle electrodes for Plastic Surgery

			
	Ø 4 mm	Ø 2,4 mm	
	H98-904-460 Length 115 mm	H98-904-260 Length 105 mm	biegsam Wolfram Ø 0,25 mm <i>flexible tungsten Ø 0.25 mm</i>
	H98-904-461 Length 115 mm	H98-904-261 Length 105 mm	abgewinkelt, biegsam Wolfram Ø 0,25 mm <i>angular, flexible tungsten Ø 0.25 mm</i>
	H98-904-462 Length 80 mm	H98-904-262 Length 70 mm	biegsam Wolfram Ø 0,25 mm <i>flexible tungsten Ø 0.25 mm</i>
	H98-904-463 Length 80 mm	H98-904-263 Length 70 mm	abgewinkelt, biegsam Wolfram Ø 0,25 mm <i>angular, flexible tungsten Ø 0.25 mm</i>
	H98-904-464 Length 45 mm	H98-904-264 Length 35 mm	biegsam Wolfram Ø 0,25 mm <i>flexible tungsten Ø 0.25 mm</i>
	H98-904-465 Length 45 mm	H98-904-265 Length 35 mm	abgewinkelt, biegsam Wolfram Ø 0,25 mm <i>angular, flexible tungsten Ø 0.25 mm</i>
	H98-904-466 Length 30 mm Pack/box à 5	H98-904-266 Length 20 mm Pack/box à 5	biegsam Wolfram Ø 0,25 mm <i>flexible tungsten Ø 0.25 mm</i>
	H98-904-467 Length 30 mm Pack/box à 5	H98-904-267 Length 20 mm Pack/box à 5	abgewinkelt, biegsam Wolfram Ø 0,25 mm <i>angular, flexible tungsten Ø 0.25 mm</i>



Ø 2,4 mm

H98-904-270

Length 180 mm

biegsam

Wolfram

Ø 0,25 mm

flexible

tungsten

Ø 0.25 mm



H98-904-271

Length 180 mm

abgewinkelt,
biegsam

Wolfram

Ø 0,25 mm

angular,

flexible

tungsten

Ø 0.25 mm



H98-904-272

Length 160 mm

biegsam

Wolfram

Ø 0,25 mm

flexible

tungsten

Ø 0.25 mm



H98-904-273

Length 160 mm

abgewinkelt,
biegsam

Wolfram

Ø 0,25 mm

angular,

flexible

tungsten

Ø 0.25 mm




Monopolare Nadelelektroden mit Keramikisolierung
Monopolar needle electrodes with ceramic

				
	Ø 4 mm	Ø 2,4 mm		
	H98-904-480 Length 115 mm 4 x Ø 0,5 mm	H98-904-280 Length 105 mm 5 x Ø 0,5 mm	Wolfram	<i>tungsten</i>
	H98-904-481 Length 115 mm 4 x Ø 0,5 mm	H98-904-281 Length 105 mm 5 x Ø 0,5 mm	abgewinkelt, Wolfram	<i>angular, tungsten</i>
	H98-904-482 Length 80 mm 4 x Ø 0,5 mm	H98-904-282 Length 70 mm 5 x Ø 0,5 mm	Wolfram	<i>tungsten</i>
	H98-904-483 Length 80 mm 4 x Ø 0,5 mm	H98-904-283 Length 70 mm 5 x Ø 0,5 mm	abgewinkelt, Wolfram	<i>angular, tungsten</i>
	H98-904-484 Length 45 mm 4 x Ø 0,5 mm	H98-904-284 Length 35 mm 5 x Ø 0,5 mm	Wolfram	<i>tungsten</i>
	H98-904-485 Length 45 mm 4 x Ø 0,5 mm	H98-904-285 Length 35 mm 5 x Ø 0,5 mm	abgewinkelt, Wolfram	<i>angular, tungsten</i>
	H98-904-486 Length 20 mm	H98-904-286 Length 20 mm	Wolfram 4 x Ø 0,5 mm	<i>tungsten 4 x Ø 0.5 mm</i>
	H98-904-487 Length 20 mm	H98-904-287 Length 20 mm	abgewinkelt, Wolfram 4 x Ø 0,5 mm	<i>angular, tungsten 4 x Ø 0.5 mm</i>

Monopolare Arthroskopie-Elektroden mit Handgriff
Monopolar Arthroscopy electrodes with handle

H98-904-501	Nadel 90° abgewinkelt, 1,5 mm, Länge 115 mm, Ø 0,6mm	<i>Needle angled 90°, 1,5 mm, length 115 mm, Ø 0.6 mm</i>	
H98-904-502	Nadel 90° abgewinkelt, 4 mm, Länge 115 mm, Ø 0,6mm	<i>Needle angled 90°, 4 mm, length 115 mm, Ø 0.6 mm</i>	
H98-904-503	Messer 45° abgewinkelt, 4 mm, Länge 115mm	<i>Knife angled 45°, 4 mm, length 115mm</i>	
H98-904-505	Tastelektrode 90° abgewinkelt, 4 mm, Länge 115 mm, Ø 1,5 mm	<i>Keying electrode angled 90°, 4 mm, length 115 mm, Ø 1.5 mm</i>	
H98-904-506	Kugelelektrode, Länge 115 mm, Ø 3 mm	<i>Ball electrode, length 115 mm, Ø 3 mm</i>	


H98-903-130	3 m	Anschlußkabel
H98-903-150	5 m	Connecting cable



Stecker Geräteseite,
passend für Hermann-,
Martin-, Berchtold-Geräte
*Plug, generator side for
Hermann, Martin,
Berchtold*

Stecker Instrumentenseite,
6-kant
*Plug, instrument side,
hexagon coding*

**Monopolare Arthroskopie-Elektroden
für 4mm oder 2,4mm Handgriffe**
*Monopolar Arthroscopy electrodes
for 4mm or 2,4mm Handles*

  Ø 4 mm Ø 2,4 mm			
   	H98-904-552	H98-904-562	Nadelelektrode 1,5 x Ø 0,6 mm, 90° gebogen <i>Needle electrode 1.5 x Ø 0.6 mm, 90° angular</i>
	H98-904-553	H98-904-563	Nadelelektrode 4,0 x Ø 0,6 mm, 90° gebogen <i>Needle electrode 4.0 x Ø 0.6 mm, 90° angular</i>
	H98-904-555	H98-904-565	Tastelektrode 4,0 x Ø 1,5 mm <i>Button electrode 4.0 x Ø 1.5 mm</i>
	H98-904-556	H98-904-566	Kugelelektrode Ø 3 mm <i>Ball electrode Ø 3 mm</i>
	H98-904-557	H98-904-567	Hohlkugelelektrode <i>Hollow ball electrode</i>
	H98-904-551	H98-904-561	Flächenelektrode <i>Flat electrode</i>
	H98-904-558	H98-904-568	Bürstenelektrode <i>Brush electrode</i>
			

**Bipolare Arthroskopie-Elektroden
für Knie-, Schulter- und Hüft-Arthroskopie**
*Bipolar Arthroscopy electrodes
for knee, shoulder and hip Arthroscopy*

170 mm	115 mm			
H98-904-520	H98-904-510	Vaporisationselektrode mit Keramikisolation „Vap“	<i>Vaporisation electrode with ceramic insulation „Vap“</i>	
H98-904-521	H98-904-511	Vaporisationselektrode „Phazer“	<i>Vaporisation electrode „Phazer“</i>	
H98-904-522	H98-904-512	Hakenelektrode 1,5 x 0,6 mm	<i>Hook electrode 1.5 x 0.6 mm</i>	
H98-904-523	H98-904-513	Hakenelektrode 4,0 x 0,6 mm	<i>Hook electrode 4.0 x 0.6 mm</i>	
H98-904-524	H98-904-514	Schlingenlektrode „Cobra“	<i>Loop electrode „Cobra“</i>	



Laparoskopie-Elektroden mit Keramikisolierung *Laparoscopic electrodes with ceramic insulated*

Zur Verwendung
mit Elektroden-
handgriff Seite 8
*To use with
electrode
handles page 8*

ohne Absaugung,
vollisoliert, 4 mm
Stecker männlich mit
Kabel H98-903-030
oder H98-903-050

*without suction,
fully insulated,
4 mm male plug to
use with cable
H98-903-030 or
H98-903-050*

mit Absaugung,
vollisoliert, 4 mm
Stecker männlich mit
Kabel H98-903-030
oder H98-903-050

*with suction,
fully insulated,
4 mm male plug to
use with cable
H98-903-030 or
H98-903-050*



H70-533-150

H70-533-100

-

Knopfelektrode *Button electrode*



H70-533-151

H70-533-101

H70-533-141

Rundhaken-
elektrode *Dissection
hook electrode*



H70-533-152

H70-533-102

H70-533-142

Hakenelektrode
90° *Dissection hook
electrode,
right angled*



H70-533-153

H70-533-103

H70-533-143

Spatелеlektrode *Dissection
spatula electrode*



Zur Verwendung
mit Kabel
H98-903-330 oder
H98-903-350

*To use with cable
H98-903-330 or
H98-903-350*



Bipolare Pinzetten *Biopolar forceps*

	Ø Spitze <i>tip</i>	Länge <i>length</i>
H98-905-000	0,3 mm	110 mm
H98-905-001	0,5 mm	110 mm
H98-905-499	0,3 mm	110 mm
H98-905-500	0,5 mm	110 mm



	Ø Spitze <i>tip</i>	Länge <i>length</i>
H98-905-011	0,3 mm	240 mm
H98-905-012	1 mm	240 mm
H98-905-013	2 mm	240 mm
H98-905-003	1 mm	220 mm
H98-905-002	2 mm	220 mm
H98-905-505	2 mm	220 mm
H98-905-005	1 mm	195 mm
H98-905-004	2 mm	195 mm
H98-905-503	1 mm	195 mm
H98-905-504	2 mm	195 mm
H98-905-009	0,3 mm	160 mm
H98-905-008	1 mm	160 mm
H98-905-007	2 mm	160 mm
H98-905-509	0,5 mm	160 mm
H98-905-501	1 mm	160 mm
H98-905-502	2 mm	160 mm

	Karo Riefelung Ø Spitze <i>tip</i>	Checker profile Länge <i>length</i>
H98-905-006	2 mm	195 mm

Spitze Vollsilber *Tip solid silver*

Bipolare Pinzetten Bipolar forceps

Zur Verwendung
mit Kabel
H98-903-330 oder
H98-903-350

To use with cable
H98-903-330 or
H98-903-350



	Ø Spitze <i>tip</i>	Länge <i>length</i>
H98-906-002	0,3 mm	110 mm
H98-906-001	0,5 mm	110 mm



	Ø Spitze <i>tip</i>	Länge <i>length</i>
H98-906-010	0,3 mm	240 mm
H98-906-011	1 mm	240 mm
H98-906-012	2 mm	240 mm
H98-906-003	1 mm	220 mm
H98-906-005	1 mm	195 mm
H98-906-004	2 mm	195 mm
H98-906-501	1 mm	195 mm
H98-906-502	2 mm	195 mm
H98-906-009	0,3 mm	160 mm
H98-906-008	0,5 mm	160 mm
H98-906-007	1 mm	160 mm
H98-906-500	1 mm	160 mm
	Karo Riefelung Ø Spitze <i>tip</i>	Checker profile Länge <i>length</i>
H98-906-006	2 mm	195 mm

Spitze Vollsilber Tip solid silver



	Ø Spitze <i>tip</i>	Länge <i>length</i>
H98-907-010	0,3 mm	240 mm
H98-907-011	1 mm	240 mm
H98-907-012	2 mm	240 mm
H98-907-002	0,3 mm	220 mm
H98-907-001	0,5 mm	220 mm
H98-907-005	0,3 mm	195 mm
H98-907-004	1 mm	195 mm
H98-907-003	2 mm	195 mm
H98-907-009	0,3 mm	165 mm
H98-907-008	0,5 mm	165 mm
H98-907-007	1 mm	165 mm
H98-907-520	0,5 mm	240 mm
H98-907-511	1,0 mm	240 mm
H98-907-512	2,0 mm	240 mm
H98-907-518	0,5 mm	195 mm
H98-907-504	1,0 mm	195 mm
H98-907-503	2,0 mm	195 mm
	Karo Riefelung Ø Spitze <i>tip</i>	Checker profile Länge <i>length</i>
H98-907-006	2 mm	195 mm

Bipolare Pinzetten
Biopolar forceps

	Ø Spitze <i>tip</i>	Länge <i>length</i>
H98-909-011	0,3 mm	240 mm
H98-909-012	1 mm	240 mm
H98-909-013	2 mm	240 mm
H98-909-008	0,3 mm	220 mm
H98-909-009	1 mm	220 mm
H98-909-010	2 mm	220 mm
H98-909-005	0,3 mm	200 mm
H98-909-006	1 mm	200 mm
H98-909-007	2 mm	200 mm
H98-909-001	1 mm	195 mm
H98-909-002	0,3 mm	180 mm
H98-909-003	1 mm	180 mm
H98-909-004	2 mm	180 mm



Zur Verwendung
mit Kabel
H98-903-330 oder
H98-903-350

*To use with cable
H98-903-330 or
H98-903-350*

	Ø Spitze <i>tip</i>	Länge <i>length</i>
H98-908-012	0,3 mm	240 mm
H98-908-013	1 mm	240 mm
H98-908-014	2 mm	240 mm
H98-908-009	0,3 mm	220 mm
H98-908-010	1 mm	220 mm
H98-908-011	2 mm	220 mm
H98-908-006	0,3 mm	200 mm
H98-908-007	1 mm	200 mm
H98-908-008	2 mm	200 mm
H98-908-002	1 mm	195 mm
H98-908-003	0,3 mm	180 mm
H98-908-004	1 mm	180 mm
H98-908-005	2 mm	180 mm



Monopolare Pinzetten
Monopolar forceps

quer gerieft
*cross-striped
 profile*



	Länge <i>length</i>
H98-911-005	250 mm
H98-911-003	210 mm
H98-911-001	185 mm

Zur Verwendung mit Kabel
 H98-903-030 und H98-903-050

*To use with cable
 H98-903-030 and H98-903-050*

**Elektroden und Zubehör
für Argongas-Gerät**
*Electrodes and accessories
for Argon gas unit*



H98-904-601 75 mm
H98-904-602 150 mm
H98-904-603 350 mm

Monopolare
starre Argon-Koagulationselektroden,
Schaftdurchmesser 4 mm

*Monopolar
rigid Argon coagulation electrodes,
shaft diameter 4 mm*



H98-902-801

Argon Chirurgiehandgriff für starre Elektroden,
3,5 m Kabel, HF-Anschluß 3-pin und Luer Lock-
Anschluss für Argon Gas

*Electrode handle for Argon-enhanced
electrosurgery, for rigid electrodes,
3.5 m cable with 3-pin HF-connection
and Luer Lock connection for Argon gas*



H98-904-610 180 mm
H98-904-611 100 mm

Monopolare starre Argon-Schneidelektrode,
Nadel 14 mm,
Schaftdurchmesser 4 mm

*Monopolar rigid Argon cutting electrode,
needle 14 mm,
shaft diameter 4 mm*

Elektroden und Zubehör für Argongas-Gerät *Electrodes and accessories for Argon gas unit*



H98-904-612 180 mm
H98-904-613 100 mm

Monopolare starre Argon-Schneidelektroden,
Messer 14 mm,
Schaftdurchmesser 4 mm

*Monopolar rigid Argon cutting electrodes,
knife 14 mm,
shaft diameter 4 mm*



H98-904-620

Monopolare flexible Argonsonde
für TBS, 1,5 m,
Aussendurchmesser 1,5 mm

*Monopolar flexible Argon
probe for TBS, 1.5 m,
outer diameter 1.5 mm*

H98-904-622

für GIT, 2,2 m,
Aussendurchmesser 2,3 mm

*for GIT, 2.2 m,
outer diameter 2.3 mm*

H98-904-623

für GIT, 2,2 m,
Aussendurchmesser 3,2 mm

*for GIT, 2.2 m,
outer diameter 3.2 mm*

H98-904-621

für TBS, 1 m,
Aussendurchmesser 2,3 mm

*for TBS, 1 m,
outer diameter 2.3 mm*




H98-903-425

Anschlusskabel für flexible
Argonsonden, 2,5 m,
HF-Anschluß 3-pin und Luer Lock-
Anschluss für Argon Gas

*Connecting cable
for flexible Argon probes,
2.5 m, 3-pin HF-connection
and Luer Lock connection
for Argon gas*

**Instrumente und Zubehör
für HF-Generator mit Argon Gas
und Thermo Stapler Funktion**
*Instruments and accessories
for HF-Generator with Argon Gas
and Thermo Stapler function*

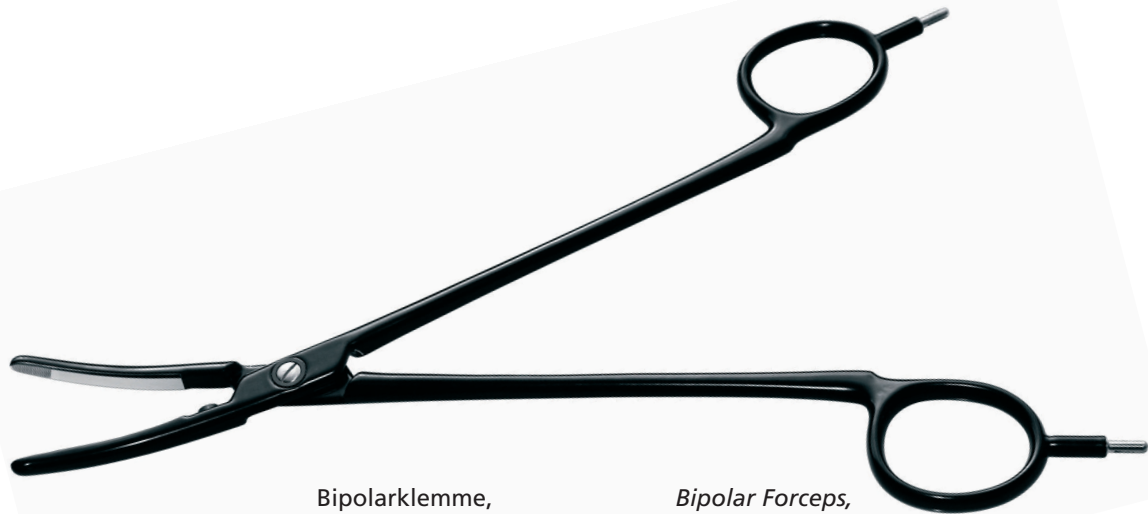

H98-916-123

Bipolarklemme,
23cm, gebogen

*Bipolar Forceps,
23cm, curved*



H98-903-550

Anschlusskabel
für Bipolarklemme
5 m

*Connecting cable
for Bipolar Forceps
5 m*

**Weitere Instrumente
zur Verwendung mit Thermo Stapler auf Anfrage**

*Further instruments
to use with Thermo Stapler on request*

HF-Generators

Easy to use

The main functions of the diathermy unit are divided into different groups to avert any confusion of the user. The most popular settings can be saved with the build in memory function. Easy power adjusting by push buttons.

Four cutting modes

The device can be equipped with four different cutting modes. Pure cut, two different coagulation cutting types and an additional cutting mode for the use under water (TUR).

Four coagulation modes

Soft coagulation and forced coagulation as well as spray and universal coagulation.

Polypectomy and Papillotomy

The system can be equipped with alternating cut and coagulation functions for operations like polypectomy and papillotomy. The polypectomy and papillotomy programm is already integrated into the models HHF 350, HHF 350 A, HHF 350A ThermoStapler and HHF 400.

Two monopolar outputs

The HHF 350 A and HHF 400 system is equipped with an additional monopolar output with independent setting possibility.

Argon gas coagulation

The use of Argon gas (an inert, non-reactive gas) offers the surgeon the following benefits:

Improved visibility due to less smoke formation.

Contact free coagulation.

Efficient coagulation at lower power.

Safety

A specially designed microprocessor is used for monitoring the cutting modus 200 times every second. A built in overload-function is controlling the activation time and protects the system against overheating and other damages.

Every time the unit is switched on, it is running through a self test.



HHF 120

H98-120-000

POWER SUPPLY

Supply voltage	230 V, 50 Hz
Rated power input	200 W

SAFETY FEATURES

Protection against electric shock:	
Class	I
Grade	CF
Low-frequency leakage currents	according to IEC 601-1-1
High-frequency leakage currents	according to IEC 601-2-2
Generator operation frequency	416 kHz
Defibrillation impulse resistance	according to EN 60601-1
NEM System	neutral electrode control
AUTOTEST	self-test of generator and accessories after switching the power on, service codes display
OVERLOAD	generator overload protection

MONOPOLAR CUTTING

Pure cutting	120 W
Forced coagulation	80 W

MONOPOLAR COAGULATION

Soft coagulation	80 W
Forced coagulation	80 W

ADDITIONAL FUNCTIONS

Bipolar coagulation	80 W
---------------------	------

WEIGHT AND DIMENSIONS

Length	350 mm
Width	240 mm
Height	100 mm
Weight	3 kg

Delivery contains: HF-Generator
Mains cable
User manual

HF-Generator



HHF 300	H98-300-000		
POWER SUPPLY			
Supply voltage	230 V +/- 10% 50 Hz or 110 V +/- 10% 60 Hz		
Rated power input	350 W		
SAFETY FEATURES			
Protection against electric shock:			
Class	I		
Grade	CF		
Low-frequency leakage currents	according to EN 60601-1		
High-frequency leakage currents	according to EN 60601-2-2		
Generator operation frequency	357 kHz		
Defibrillation impulse resistance	according to EN 60601-1		
NEM System	neutral electrode control		
AUTOTEST	self-test of generator and accessories after switching the power on, service codes display		
		OVERLOAD	generator overload protection
		MONOPOLAR CUTTING	
		Pure cutting	250 W for 300 Ω
		Forced coagulation	250 W for 300 Ω
		MONOPOLAR COAGULATION	
		Soft coagulation	150 W for 50 Ω
		Forced coagulation	150 W for 300 Ω
		BIPOLAR COAGULATION	
		Bipolar coagulation	100 W for 50 Ω
		Auto-Start / Auto-Stop	automatic start and stop of bipolar coagulation
		OTHER FEATURES	
		PowerStart System	simplify the beginning of cutting process
		SURGILOGIC System	automatic power regulation depends on needs
		WEIGHT AND DIMENSIONS	
		Length	380 mm
		Width	360 mm
		Height	165 mm
		Weight	6,5 kg
		Delivery contains:	HF-Generator Mains cable User manual

HF-Generator



HHF 350	H98-350-000
POWER SUPPLY	
Supply voltage	230 V, 50 Hz
Rated power input	500 W
SAFETY FEATURES	
Protection against electric shock:	
Class	I
Grade	CF
Low-frequency leakage currents	according to IEC 601-1-1
High-frequency leakage currents	according to IEC 601-2-2
Generator operation frequency	357 kHz
Defibrillation impulse resistance	according to EN 60601-1
NEM System	neutral electrode application control
AUTOTEST	self-test of generator and accessories after switching the power on, service codes display
OVERLOAD	generator overload protection
MONOPOLAR CUTTING	
Pure cutting	350 W
Blend cutting I	180 W
Blend cutting II	150 W
Blend cutting III	150 W
Cutting with desiccation	150 W
Cutting in water environment	350 W

MONOPOLAR COAGULATION

Soft coagulation	180 W
Forced coagulation	180 W
Spray coagulation	80 W
Universal coagulation	80 W

BIPOLAR COAGULATION

Bipolar coagulation	120 W
Auto-Start / Auto-Stop	automatic start and stop of bipolar coagulation

BIPOLAR CUTTING

Bipolar cutting (4 different levels of haemostasis)	100 W
Bipolar cutting in water environment	350 W

OTHER FEATURES

PowerStart System	simplify the beginning of cutting process
SURGILOGIC System	automatic power regulation depends on needs
PP program	alternating cut&coag – endoscopic program
Program memory	9 different memory locations
MultiSwitch	remote program selection with using MultiSwitch footswitch

WEIGHT AND DIMENSIONS

Length	420 mm
Width	380 mm
Height	160 mm
Weight	9 kg

Delivery contains: HF-Generator
Mains cable
User manual

HF-Generator



HHF 400

H98-350-002

POWER SUPPLY

Supply voltage	230 V, 50 Hz
Rated power input	500 W

SAFETY FEATURES

Protection against electric shock:	
Class	I
Grade	CF
Low-frequency leakage currents	according to IEC 601-1-1
High-frequency leakage currents	according to IEC 601-2-2
Generator operation frequency	357 kHz
Defibrillation impulse resistance	according to EN 60601-1
NEM System	neutral electrode application control
AUTOTEST	self-test of generator and accessories after switching the power on, service codes display
OVERLOAD	generator overload protection

MONOPOLAR CUTTING

Pure cutting	350 W
Blend cutting I	180 W
Blend cutting II	150 W
Blend cutting III	150 W
Cutting with desiccation	150 W
Cutting in water environment	350 W

MONOPOLAR COAGULATION

Soft coagulation	180 W
Forced coagulation	180 W
Spray coagulation	80 W
Universal coagulation	80 W

BIPOLAR COAGULATION

Bipolar coagulation	120 W
Auto-Start / Auto-Stop	automatic start and stop of bipolar coagulation

BIPOLAR CUTTING

Bipolar cutting (4 different levels of haemostasis)	100 W
Bipolar cutting in water environment	350 W

OTHER FEATURES

PowerStart System	simplify the beginning of cutting process
SURGILOGIC System	automatic power regulation depends on needs
PP program	alternating cut&coag – endoscopic program
Program memory	9 different memory locations
MultiSwitch	remote program selection with MultiSwitch footswitch

ADDITIONAL MONOPOLAR OUTPUT

equipped with 2 monopolar outputs

WEIGHT AND DIMENSIONS

Length	420 mm
Width	380 mm
Height	160 mm
Weight	9 kg

Delivery contains: HF-Generator
Mains cable
User manual

HF-Generator with Argon gas



HHF 350 A

H98-350-001

POWER SUPPLY

Supply voltage	230 V, 50 Hz
Rated power input	500 W

SAFETY FEATURES

Protection against electric shock:	
Class	I
Grade	CF
Low-frequency leakage currents	according to IEC 601-1-1
High-frequency leakage currents	according to IEC 601-2-2
Generator operation frequency	357 kHz
Defibrillation impulse resistance	according to EN 60601-1
NEM System	neutral electrode application control
AUTOTEST	self-test of generator and accessories after switching the power on, service codes display
OVERLOAD	generator overload protection

MONOPOLAR CUTTING

Pure cutting	350 W
Blend cutting I	180 W
Blend cutting II	150 W
Blend cutting III	150 W
Cutting with desiccation	150 W
Cutting in water environment	350 W
Argon cutting	350 W

MONOPOLAR COAGULATION

Soft coagulation	180 W
Forced coagulation	180 W
Spray coagulation	80 W
Universal coagulation	80 W
Argon coagulation	80 W
Argon pulse coagulation	80 W

BIPOLAR COAGULATION

Bipolar coagulation	120 W
Auto-Start / Auto-Stop	automatic start and stop of bipolar coagulation

BIPOLAR CUTTING

Bipolar cutting (4 different levels of haemostasis)	100 W
Bipolar cutting in water environment	350 W

ARGON

Gas type	pure argon 5.0 (99,999%)
Inlet gas pressure	0.25 – 0.4 MPa
Gas outflow	0.1 – 9.9 l/min, regulated 0.1 l/min in whole operation range
Pressure gauge	reducer (0.4MPa) on argon cylinder

OTHER FEATURES

PowerStart System	simplify the beginning of cutting process
SURGILOGIC System	automatic power regulation depends on needs
PP program	alternating cut&coag – endoscopic program
Program memory	9 different memory locations
Outputs	2 monopolar, 1 bipolar
MultiSwitch	remote program selection with using MultiSwitch footswitch

WEIGHT AND DIMENSIONS

Length	420 mm
Width	380 mm
Height	160 mm
Weight	9 kg

Delivery contains: HF-Generator
Mains cable
User manual

HF-Generator with Argon gas and ThermoStapler



HHF 350 ARGON ThermoStapler

H98-350-003

POWER SUPPLY

Supply voltage	230 V, 50 Hz
Rated power input	500 W

SAFETY FEATURES

Protection against electric shock:	
Class	I
Grade	CF
Low-frequency leakage currents	according to IEC 601-1-1
High-frequency leakage currents	according to IEC 601-2-2
Generator operation frequency	357 kHz
Defibrillation impulse resistance	according to EN 60601-1
NEM System	neutral electrode application control
AUTOTEST	self-test of generator and accessories after switching the power on, service codes display
OVERLOAD	generator overload protection

MONOPOLAR CUTTING

Pure cutting	350 W
Blend cutting I	180 W
Blend cutting II	150 W
Blend cutting III	150 W
Cutting with desiccation	150 W
Cutting in water environment	350 W
Argon cutting	350 W

MONOPOLAR COAGULATION

Soft coagulation	180 W
Forced coagulation	180 W
Spray coagulation	80 W
Universal coagulation	80 W
Argon coagulation	80 W
Argon pulse coagulation	80 W

BIPOLAR COAGULATION

Bipolar coagulation	120 W
Auto-Start / Auto-Stop	automatic start and stop of bipolar coagulation

BIPOLAR CUTTING

Bipolar cutting (4 different levels of haemostasis)	100 W
Bipolar cutting in water environment	350 W

THERMOSTAPLER

Vessel sealing	250 W
Auto-Stop	automatic stop of sealing process after achieving the optimal effect

ARGON

Gas type	pure argon 5.0 (99,999%)
Inlet gas pressure	0.25 – 0.4 MPa
Gas outflow	0.1 – 9.9 l/min, regulated 0.1 l/min in whole operation range
Pressure gauge	reducer (0.4MPa) on argon cylinder

OTHER FEATURES

PowerStart System	simplify the beginning of cutting process
SURGILOGIC System	automatic power regulation depends on needs
PP program	alternating cut&coag – endoscopic program
Program memory	9 different memory locations
Output	2 monopolar, 1 bipolar, 1 ThermoStapler
MultiSwitch	remote program selection with using MultiSwitch footswitch

WEIGHT AND DIMENSIONS

Length	420 mm
Width	380 mm
Height	160 mm
Weight	9 kg

**Fußschalter
für Hermann Generatoren**
*Foot switches
for Hermann generators*



H98-912-010

Fußschalter MINI,
6-Pin Stecker
für H98-120-000 Generator

*Single foot switch MINI,
6-pin plug
for H98-120-000 generator*



H98-912-021

Doppel-Fußschalter,
6-Pin Stecker,
OP geprüft für
H98-120-000
H98-300-000
H98-350-000
H98-350-001
H98-350-002
H98-350-003 Generatoren

*Double foot switch,
6-pin plug,
OR proofed for
H98-120-000
H98-300-000
H98-350-000
H98-350-001
H98-350-002
H98-350-003 generators*



H98-912-030

Großer Doppel-Fußschalter,
„MultiSwitch“
mit Umschaltknopf,
6-Pin Stecker,
OP geprüft für
H98-300-000
H98-350-000
H98-350-001
H98-350-002
H98-350-003 Generatoren

*Big double foot switch,
„MultiSwitch“
three button foot switch,
6-pin plug,
OR proofed for
H98-300-000
H98-350-000
H98-350-001
H98-350-002
H98-350-003 generators*



H98-912-001	Argon Regulator	<i>Argon Regulator</i>
H98-912-002	Sterilfilter-Set, 50 Stück	<i>Sterilfilter set, packing unit 50 pcs.</i>



H98-913-001	Gerätewagen für Hermann Generatoren	<i>Trolley for Hermann generators</i>
--------------------	--	---

Artikel-Nummern Verzeichnis Order Number Index


Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page
H50-050-010	10	H98-901-004	4	H98-903-130	10
H50-050-011	10	H98-901-005	4	H98-903-130	21
H50-050-012	10	H98-901-101	6	H98-903-150	10
H50-055-010	10	H98-901-102	6	H98-903-150	21
H50-055-011	10	H98-901-103	6	H98-903-313	11
H50-055-012	10	H98-901-104	6	H98-903-315	11
H70-533-100	24	H98-901-105	6	H98-903-323	11
H70-533-101	24	H98-901-112	7	H98-903-325	11
H70-533-102	24	H98-901-120	5	H98-903-330	11
H70-533-103	24	H98-901-121	5	H98-903-333	11
H70-533-141	24	H98-901-175	5	H98-903-335	11
H70-533-142	24	H98-902-030	8	H98-903-343	11
H70-533-143	24	H98-902-050	8	H98-903-345	11
H70-533-150	24	H98-902-130	8	H98-903-350	11
H70-533-151	24	H98-902-150	8	H98-903-373	11
H70-533-152	24	H98-902-245	8	H98-903-375	11
H70-533-153	24	H98-902-345	8	H98-903-383	11
H98-120-000	33	H98-902-731	8	H98-903-385	11
H98-300-000	34	H98-902-801	29	H98-903-395	11
H98-350-000	35	H98-902-911	9	H98-903-425	30
H98-350-001	37	H98-902-913	9	H98-903-550	31
H98-350-002	36	H98-902-914	9	H98-903-630	7
H98-350-003	38	H98-903-030	10	H98-903-650	7
H98-901-003	4	H98-903-050	10	H98-903-730	7

Artikel-Nummern Verzeichnis

Order Number Index

Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page
H98-903-750	7	H98-904-216	13	H98-904-267	18	H98-904-414	13	H98-904-460	18
H98-903-830	7	H98-904-219	12	H98-904-270	19	H98-904-415	13	H98-904-461	18
H98-903-850	7	H98-904-220	12	H98-904-271	19	H98-904-416	13	H98-904-462	18
H98-903-950	7	H98-904-230	16	H98-904-272	19	H98-904-417	13	H98-904-463	18
H98-904-101	15	H98-904-231	16	H98-904-273	19	H98-904-418	13	H98-904-464	18
H98-904-105	15	H98-904-232	16	H98-904-280	20	H98-904-419	12	H98-904-465	18
H98-904-106	15	H98-904-233	16	H98-904-281	20	H98-904-420	12	H98-904-466	18
H98-904-107	15	H98-904-237	17	H98-904-282	20	H98-904-430	16	H98-904-467	18
H98-904-115	15	H98-904-238	17	H98-904-283	20	H98-904-431	16	H98-904-480	20
H98-904-116	15	H98-904-239	17	H98-904-284	20	H98-904-432	16	H98-904-481	20
H98-904-117	15	H98-904-241	17	H98-904-285	20	H98-904-433	16	H98-904-482	20
H98-904-118	15	H98-904-242	17	H98-904-286	20	H98-904-434	16	H98-904-483	20
H98-904-201	12	H98-904-243	17	H98-904-287	20	H98-904-435	16	H98-904-484	20
H98-904-202	12	H98-904-245	16	H98-904-401	12	H98-904-437	17	H98-904-485	20
H98-904-203	12	H98-904-246	16	H98-904-402	12	H98-904-438	17	H98-904-486	20
H98-904-204	12	H98-904-247	16	H98-904-403	12	H98-904-439	17	H98-904-487	20
H98-904-205	12	H98-904-255	14	H98-904-404	12	H98-904-440	17	H98-904-490	17
H98-904-206	12	H98-904-256	14	H98-904-405	12	H98-904-441	17	H98-904-491	17
H98-904-207	12	H98-904-257	14	H98-904-406	12	H98-904-442	17	H98-904-501	21
H98-904-208	12	H98-904-260	18	H98-904-407	12	H98-904-443	17	H98-904-502	21
H98-904-209	12	H98-904-261	18	H98-904-408	12	H98-904-445	16	H98-904-503	21
H98-904-211	13	H98-904-262	18	H98-904-409	12	H98-904-446	16	H98-904-505	21
H98-904-212	13	H98-904-263	18	H98-904-410	13	H98-904-447	16	H98-904-506	21
H98-904-213	13	H98-904-264	18	H98-904-411	13	H98-904-455	14	H98-904-510	23
H98-904-214	13	H98-904-265	18	H98-904-412	13	H98-904-456	14	H98-904-511	23
H98-904-215	13	H98-904-266	18	H98-904-413	13	H98-904-457	14	H98-904-512	23

Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page	Art. Nr. art.-no.	Seite page
H98-904-513	23	H98-904-612	30	H98-905-509	25	H98-907-011	26	H98-909-006	27
H98-904-514	23	H98-904-613	30	H98-906-001	26	H98-907-012	26	H98-909-007	27
H98-904-520	23	H98-904-620	30	H98-906-002	26	H98-907-503	26	H98-909-008	27
H98-904-521	23	H98-904-621	30	H98-906-003	26	H98-907-504	26	H98-909-009	27
H98-904-522	23	H98-904-622	30	H98-906-004	26	H98-907-511	26	H98-909-010	27
H98-904-523	23	H98-904-623	30	H98-906-005	26	H98-907-512	26	H98-909-011	27
H98-904-524	23	H98-905-000	25	H98-906-006	26	H98-907-518	26	H98-909-012	27
H98-904-551	22	H98-905-001	25	H98-906-007	26	H98-907-520	26	H98-909-013	27
H98-904-552	22	H98-905-002	25	H98-906-008	26	H98-908-002	27	H98-911-001	28
H98-904-553	22	H98-905-003	25	H98-906-009	26	H98-908-003	27	H98-911-003	28
H98-904-555	22	H98-905-004	25	H98-906-010	26	H98-908-004	27	H98-911-005	28
H98-904-556	22	H98-905-005	25	H98-906-011	26	H98-908-005	27	H98-912-001	40
H98-904-557	22	H98-905-006	25	H98-906-012	26	H98-908-006	27	H98-912-002	40
H98-904-558	22	H98-905-007	25	H98-906-500	26	H98-908-007	27	H98-912-010	39
H98-904-561	22	H98-905-008	25	H98-906-501	26	H98-908-008	27	H98-912-021	39
H98-904-562	22	H98-905-009	25	H98-906-502	26	H98-908-009	27	H98-912-030	39
H98-904-563	22	H98-905-011	25	H98-907-001	26	H98-908-010	27	H98-913-001	40
H98-904-565	22	H98-905-012	25	H98-907-002	26	H98-908-011	27	H98-916-123	31
H98-904-566	22	H98-905-013	25	H98-907-003	26	H98-908-012	27		
H98-904-567	22	H98-905-499	25	H98-907-004	26	H98-908-013	27		
H98-904-568	22	H98-905-500	25	H98-907-005	26	H98-908-014	27		
H98-904-601	29	H98-905-501	25	H98-907-006	26	H98-909-001	27		
H98-904-602	29	H98-905-502	25	H98-907-007	26	H98-909-002	27		
H98-904-603	29	H98-905-503	25	H98-907-008	26	H98-909-003	27		
H98-904-610	29	H98-905-504	25	H98-907-009	26	H98-909-004	27		
H98-904-611	29	H98-905-505	25	H98-907-010	26	H98-909-005	27		

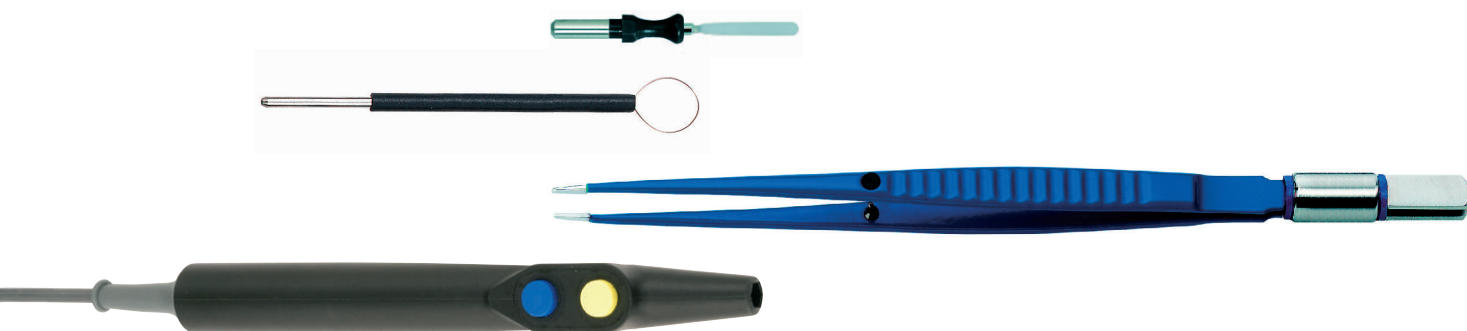

Bismarckstr 38 78532 Tuttlingen Germany

www-mcm-export.com

info@mcm-export.com

MCC Medical is a registered trademark of MC Medizintechnik Export
